

SMOOTH
T E C H N O L O G Y



AW MILLER
TECHNICAL SALES, INC.

EAST AURORA, NY | HARMONY, PA | STE-LAURENT, QC | HARLEYSVILLE, PA
716.652.8282 | 724.453.1690 | 514.333.9174 | 215.256.8281



VORTEX e-V

SERIES

1250 V/8

1250 V/8S

1600 V/10

1600 V/10S

Advanced features of the MAZATROL SmoothX CNC

Touch screen operation similar to your smartphone/tablet

PC with Windows® 8 embedded OS

Fastest CNC in the world with latest hardware and software for unprecedented speed and precision

High-precision machining of complex contours at high-speed feedrates

Easy conversational programming of multiple-surface machining

Smooth graphical user interface and support functions for unsurpassed ease of operation

MTConnect® ready for convenient networking

Easily configure machine parameters for different workpiece materials and application requirements

Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

MTConnect is a registered trademark of AMT in the United States and other countries.



MAZATROL

SMOOTHX




Innovative support for operators

ergonomics

Ease of operation

eco-friendly

Designed with environmental considerations

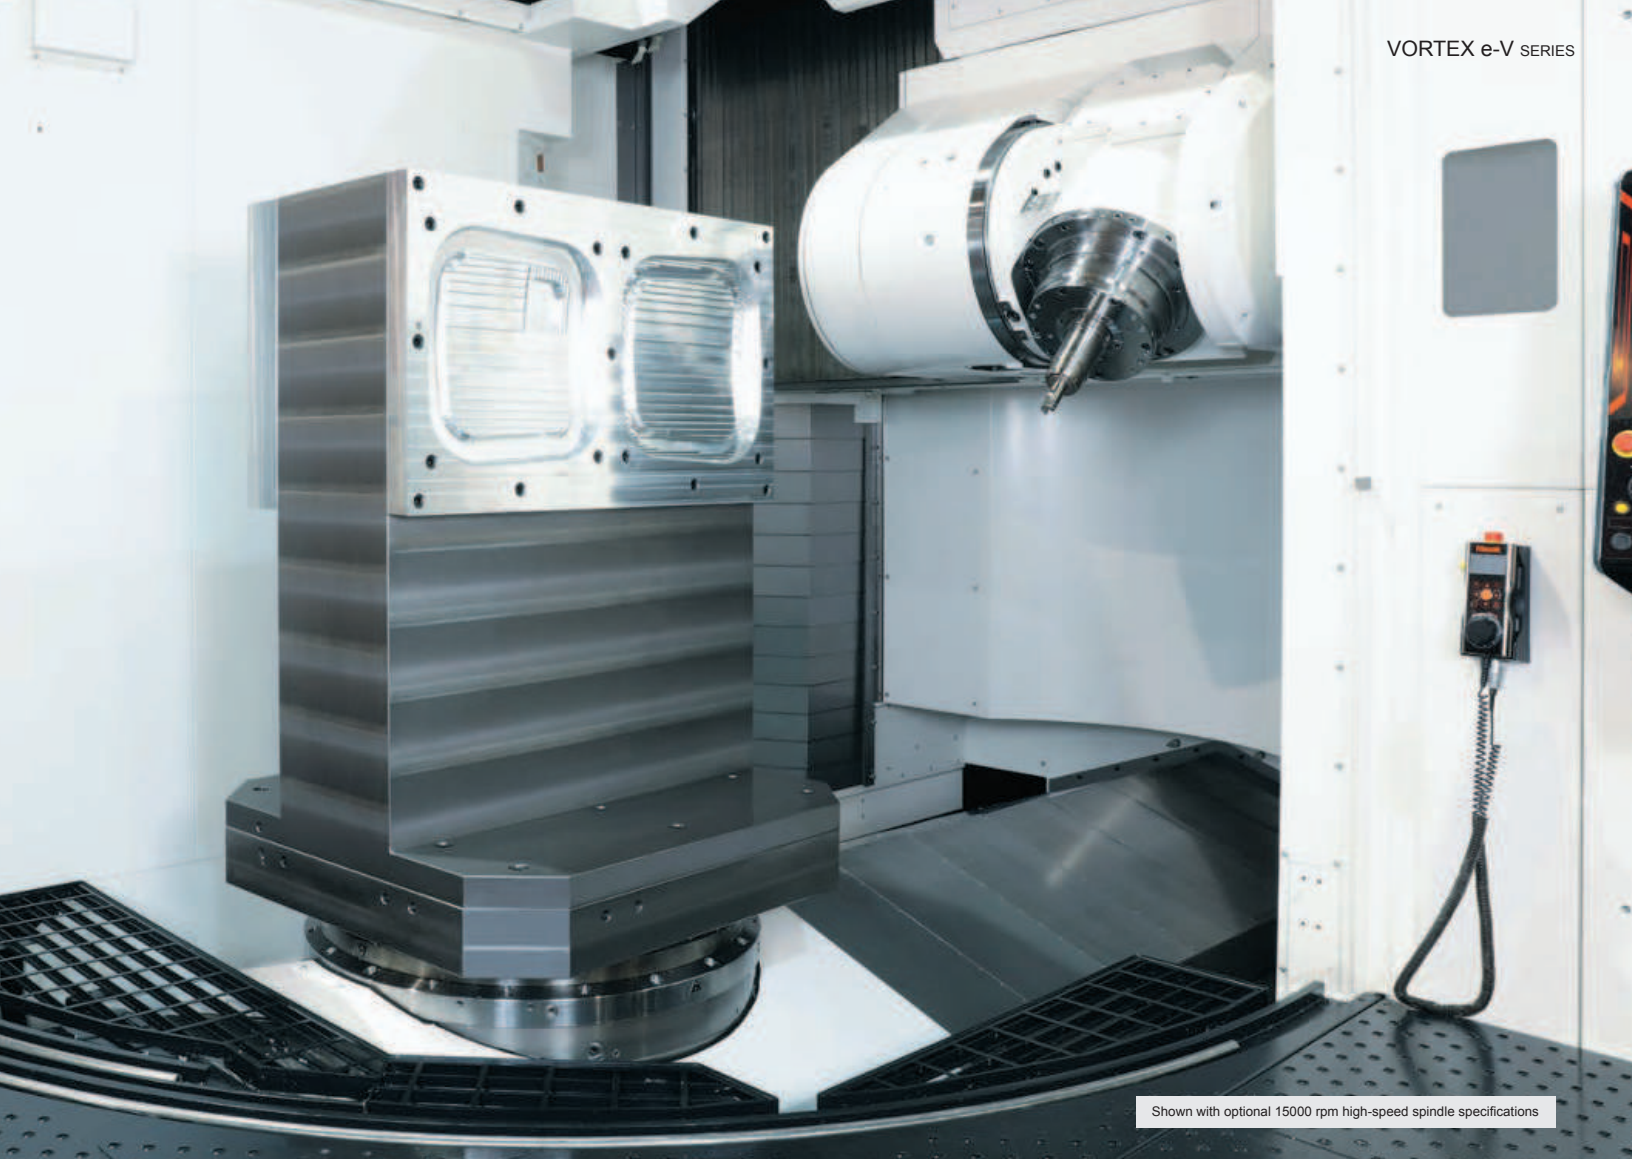

High-performance simultaneous 5-axis machining center designed for exceptional versatility and efficiency

VORTEX e-V SERIES

Simultaneous 5-axis Vertical Machining Centers

- Double column ensures high-accuracy machining in large working area
- MAZATROL SmoothX CNC together with linear roller guides ensure high-speed feedrates with high accuracy
- Versatile multi-tasking machining thanks to 0.0001° positioning of B and C axes
- Wide range of spindle specifications: standard 10000 rpm, high torque 5000 rpm for difficult-to-machine materials and high-speed 15000 rpm

Extensive Series Range

Designed to meet the machining requirements of a wide range of large workpieces





Shown with 15000 rpm milling spindle, 84-tool magazine and status light (3 colors) (optional)

VORTEX	e-1250V/8 [2 pallet changer]	e-1250V/8S [Single table]
Max. workpiece diameter x Max. workpiece height	$\varnothing 1450 \text{ mm } (\varnothing 57.09")$ x 1600 mm (62.99")	$\varnothing 1500 \text{ mm } (\varnothing 59.06")$ x 1655 mm (65.16")
Max. load (including pallet)	2700 kg (5952 lbs)	4000 kg (8818 lbs)
Pallet size	$\square 800 \text{ mm } (\square 31.50")^*$, $\square 1000 \text{ mm } (\square 39.37")^*$, $\varnothing 1000 \text{ mm } (\varnothing 39.37")^*$	$\varnothing 800 \text{ mm } (\varnothing 31.50")^*$, $\varnothing 1000 \text{ mm } (\varnothing 39.37")^*$, $\varnothing 1250 \text{ mm } (\varnothing 49.21")^*$
*OPTION		
Stroke (X/Y/Z)	1875 mm/1250 mm/1345 mm (73.82"/49.21"/52.95")	1875 mm/1250 mm/1345 mm (73.82"/49.21"/52.95")
(B/C)	150°/360°	150°/360°

X-axis stroke diagram

Unit: mm (inch)

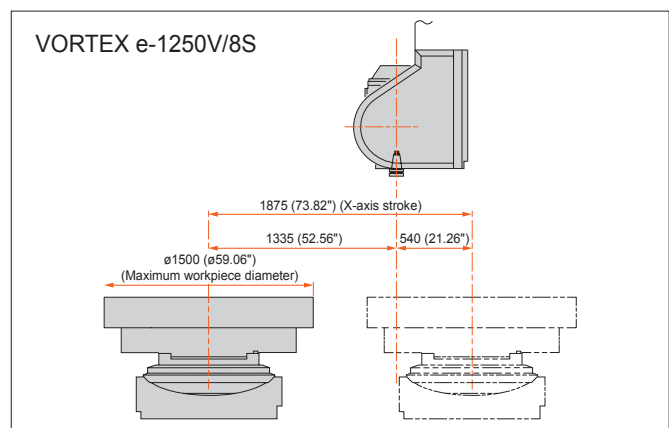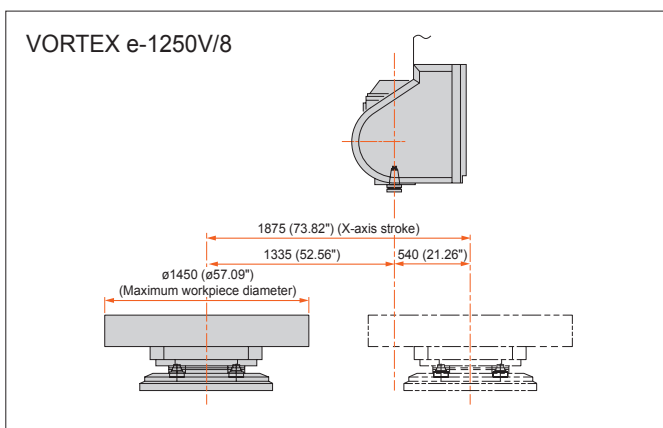




Shown with optional 84-tool magazine



Shown with optional 84-tool magazine and status light (3 colors)

e-1600V/10 [2 pallet changer]

ø2050 mm (ø80.71")
x
1600 mm (62.99")




5000 kg (11023 lbs)

□1000 mm (□39.37")*,
ø1400 mm (ø55.12")*

2315 mm/1600 mm/1345 mm
(91.14"/62.99"/52.95")
150°/360°

e-1600V/10S [Single table]



ø2300 mm (ø90.55")
x
1669 mm (65.71")



7000 kg (15432 lbs)

ø1250 mm (ø49.21")*, ø1400 mm (ø55.12")*,
ø1500 mm (ø59.06")*, ø1650 mm (ø64.96")*

2165 mm/1600 mm/1345 mm
(85.24"/62.99"/52.95")
150°/360°

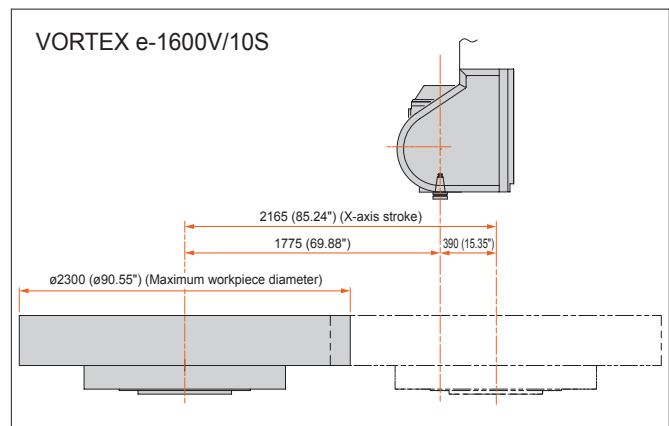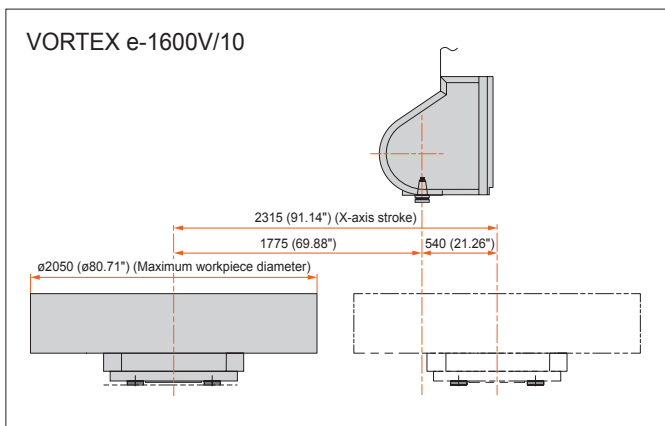

Higher Accuracy

High rigidity construction for high accuracy machining

Prevention of temperature change – milling spindle cooling


Temperature controlled cooling oil circulates through the milling spindle headstock to prevent heat displacement.

B axis roller gear cam design

Elimination of backlash ensures high accuracy and high efficiency machining. Over the rotary positioning range of 150 degrees, positioning accuracy is two times better than the ISO standard.

Direct drive motor


Direct drive motor used for C-axis operations contributes to high-accuracy machining. Benefits include elimination of vibration, heat and backlash.




Precision table clamping

The pallet and table are clamped on taper cones to ensure high rigidity and high-accuracy positioning repeatability during pallet changes.


Single table e-1250V/8S and e-1600V/10S: tables are bolted to machine base.

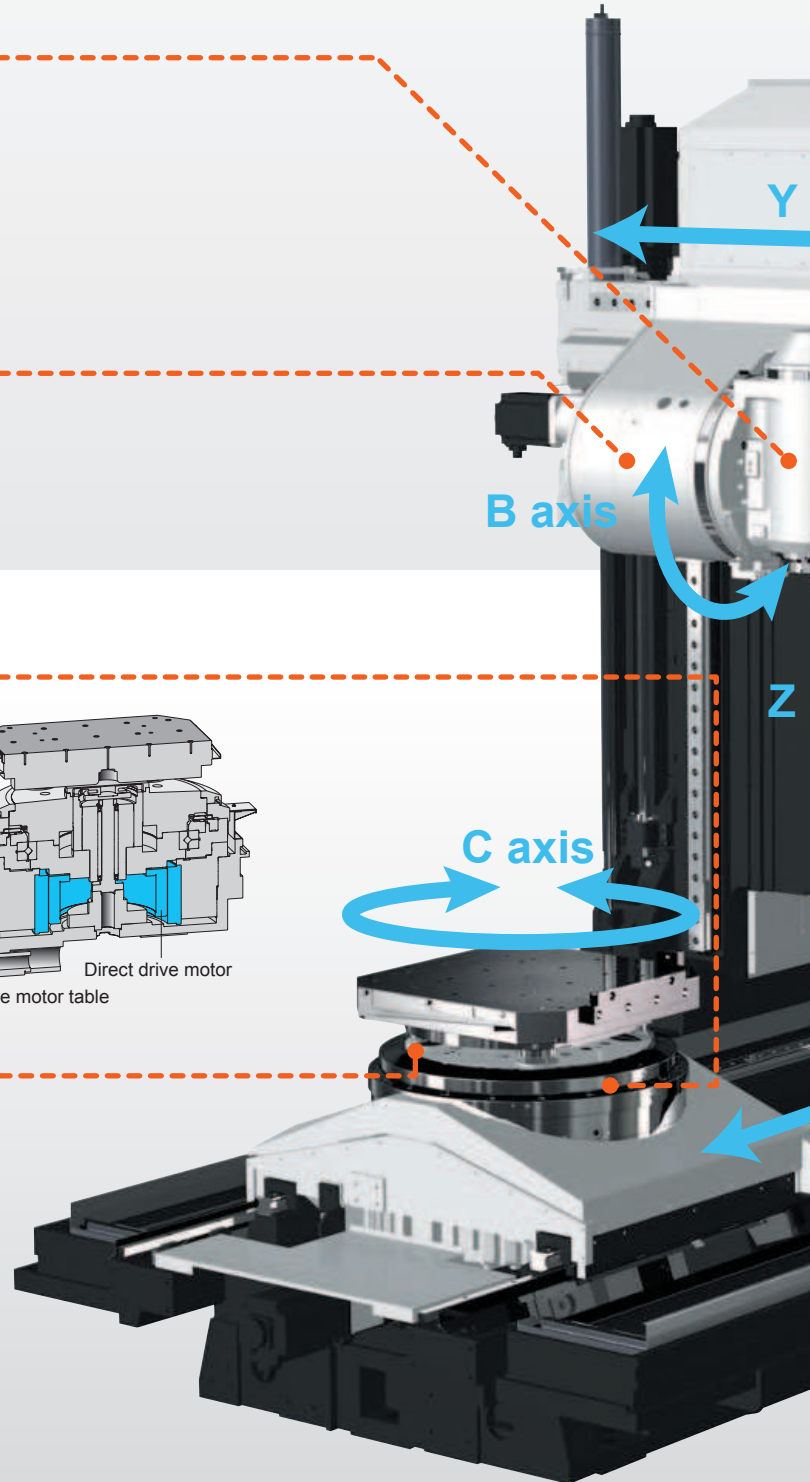

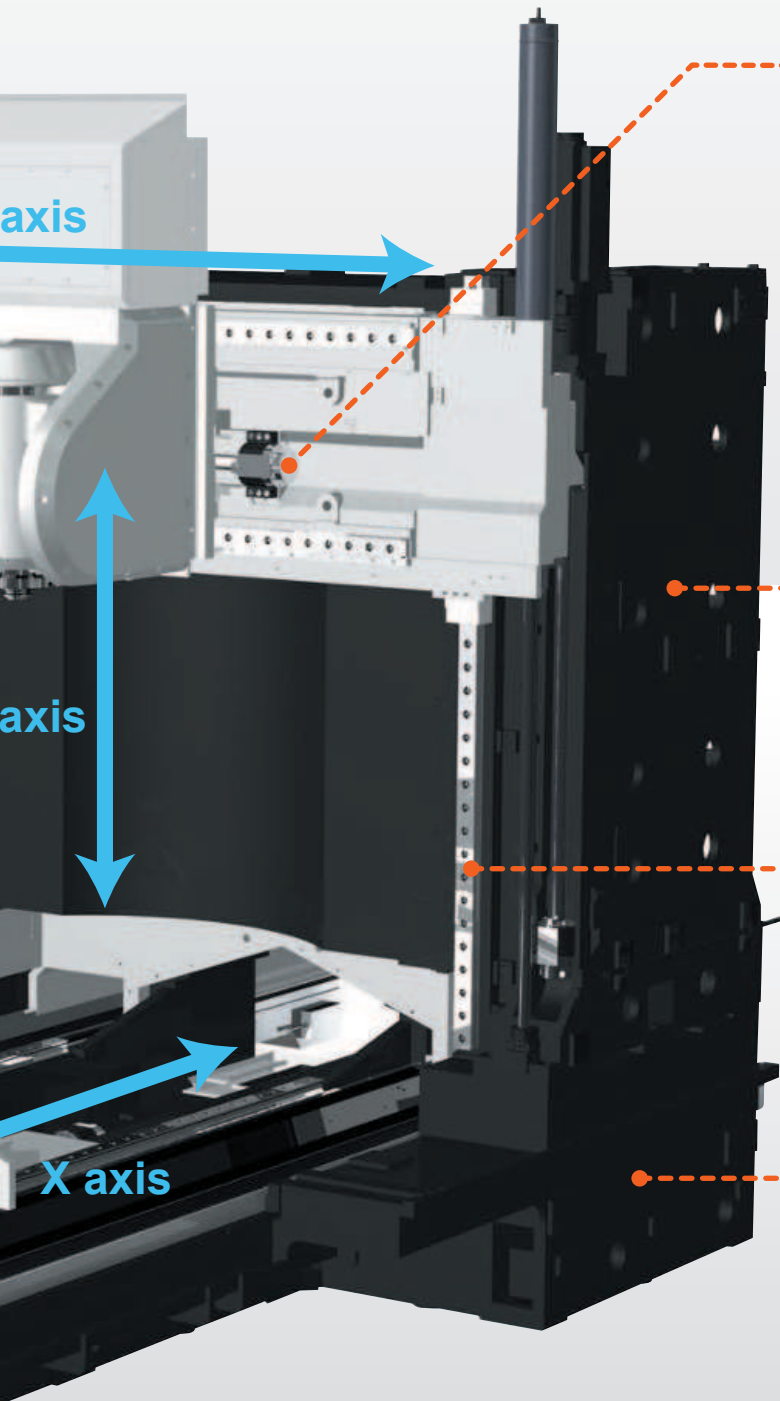

Ballscrew core cooling

Temperature controlled cooling oil circulates through the ball screw cores to ensure stable machining accuracy over extended periods of high speed operation.

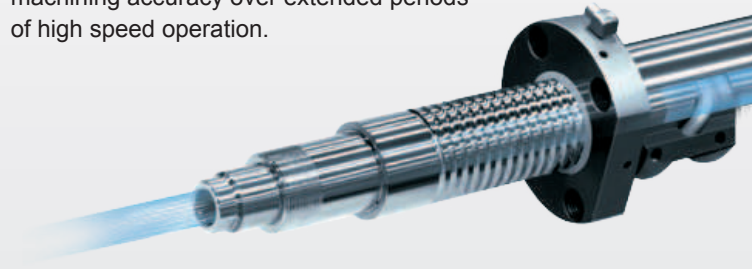

Rigid, stable column

The column shape and weight distribution have been analyzed thoroughly so the center of gravity is located to provide exceptional rigidity and stability.

Linear roller guides utilized on the X, Y, and Z axes

Linear roller guides on the X, Y, and Z axes are utilized by the VORTEX e-V series to provide high accuracy and heavy-duty machining.

High-rigidity base

Rigidity is ensured thanks to the wide base with thick walls and optimized rib layout.

Higher Productivity



Enhanced milling performance for high productivity

High-speed, high-output milling spindle

The spindle has a standard top speed of 10000 rpm, with a high-speed 15000 rpm spindle and high-torque 5000 rpm spindle available as options.

Machining example – Standard specification milling spindle

Material removal rate **1092** cc/min (66.64 in³/min)

Material S45C

Tool Face mill \varnothing 160 (\varnothing 6.30"), 8 teeth


Cutting conditions	Spindle speed	500 rpm
	Cutting speed	250 m/rpm (820 SFM)
	Depth of cut	4.2 mm
	Feed/tooth	0.45 mm/tooth

10000 rpm milling spindle

Speed	10000 rpm
Output (40% ED/30-min. rating/Cont. rating)	AC 37 kW (50 HP)/AC 30 kW (40 HP)
Max. torque (40% ED/30-min. rating/Cont. rating)	260 N • m (192 ft • lbs)/191 N • m (141 ft • lbs)


Output/torque diagram

— Output (40% ED/30-min. rating/Cont. rating) — Torque (40% ED/30-min. rating/Cont. rating)
 — Output (Cont. rating) — Torque (Cont. rating)

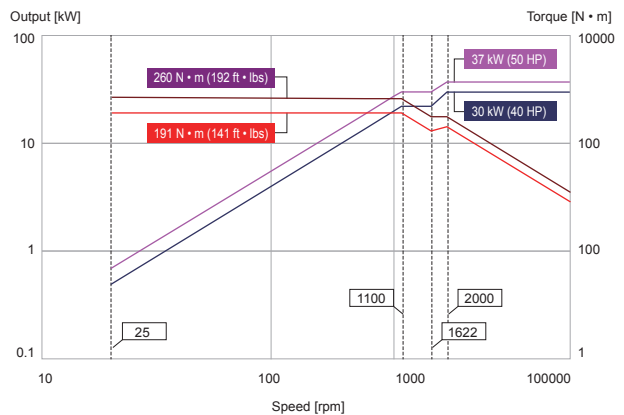


Integral spindle/motor

The integral spindle/motor (standard 10000 rpm spindle specification and optional 5000 rpm and 15000 rpm spindle specifications) eliminates a transmission utilizing belts and gears to ensure high-efficiency, high-accuracy machining as well as exceptional surface finishes.

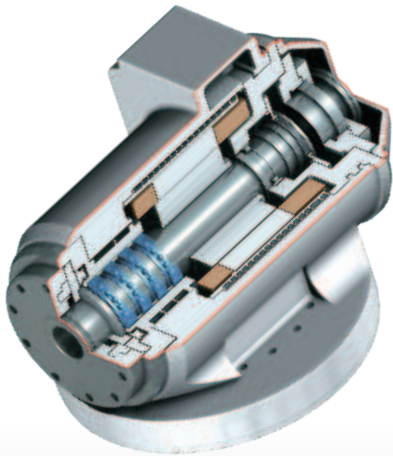

B-axis tilting range 150°

The B-axis tilting range 150° (-30° ~ 120°) is driven by a roller gear cam without any backlash to ensure high accuracy.

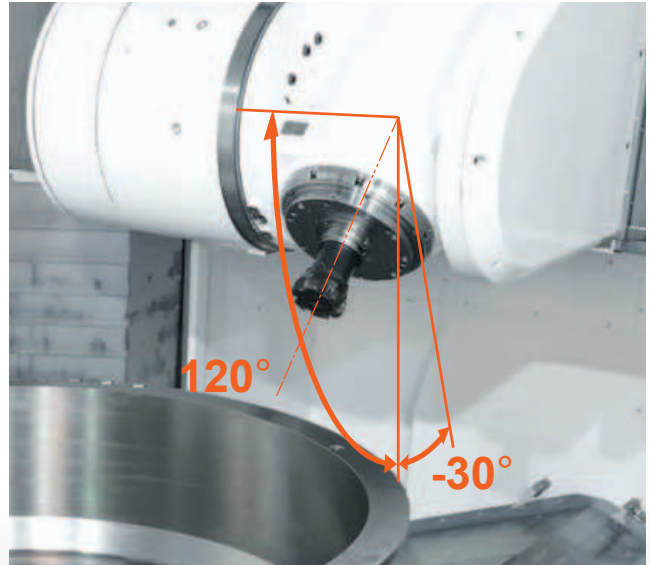


High torque 5000 rpm milling spindle

OPTION

Speed	5000 rpm
Output (40% ED/30-min. rating/Cont. rating)	AC 37 kW (50 HP)/AC 30 kW (40 HP)
Max. torque (40% ED/30-min. rating/Cont. rating)	667 N · m (492 ft · lbs)/500 N · m (369 ft · lbs)

Output/torque diagram

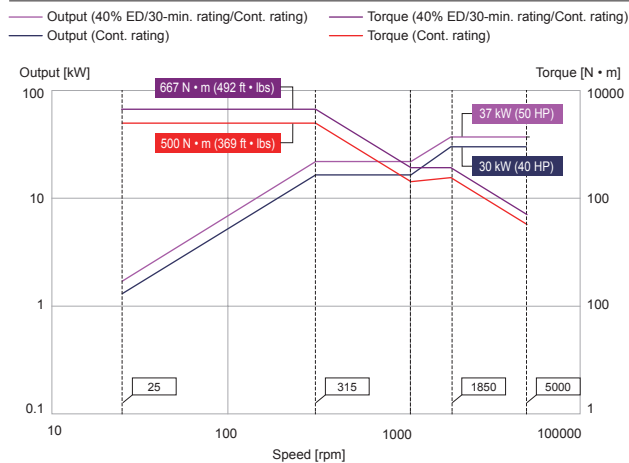


High speed 15000 rpm milling spindle

OPTION

Speed	15000 rpm
Output (40% ED/30-min. rating/Cont. rating)	AC 56 kW (75 HP)/AC 45 kW (60 HP)
Max. torque (40% ED/30-min. rating/Cont. rating)	143 N · m (105 ft · lbs)/118 N · m (87 ft · lbs)


Note: The distance from the B axis center of rotation to the tool gauge line is 350 mm (13.78"). The machining area is reduced by 50 mm (1.97") compared to the standard spindle.

Output/torque diagram

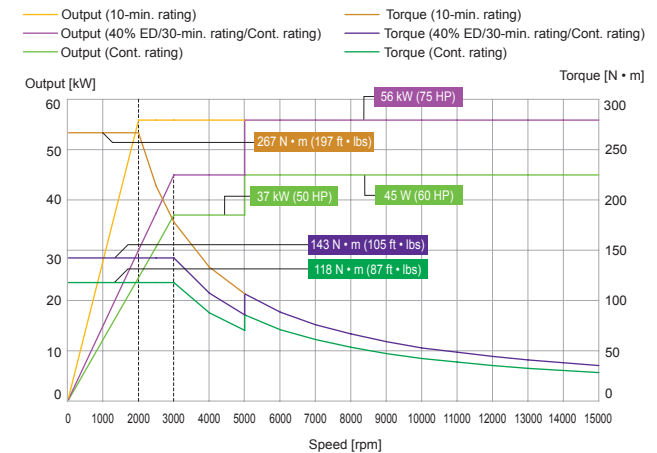

High Productivity

Direct drive motor table

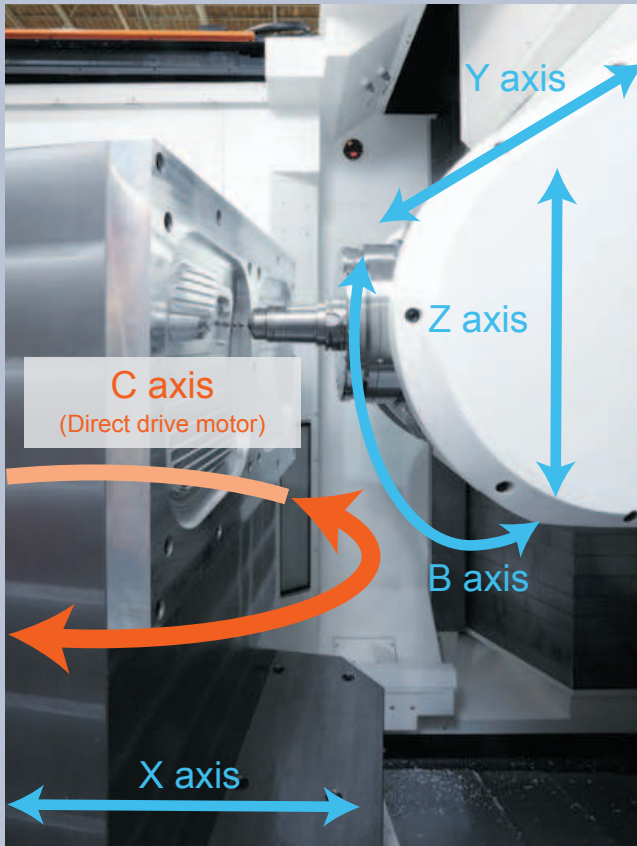

Shown with optional 15000 rpm high-speed spindle specification

Direct drive table motor provides high performance 5-axis simultaneous machining.

For heavy-duty cutting, high-torque specification is an option.

Direct drive motor table specification

	e-1250V/8, e-1250V/8S	e-1600V/10, e-1600V/10S
Minimum input increment (C axis)		0.0001°
Rapid traverse rate (C axis)	25 rpm	20 rpm
90° indexing time	1.1 sec	1.4 sec
Contouring torque	3180 N • m (2345 ft • lbs) [5810 N • m (4285 ft • lbs): High-torque specification (option)]	

Tool magazine capacities available for any production requirement

High-speed, high-rigidity automatic tool changer

The automatic tool changer is designed for reliability and performs tool changes at high speed – including heavy tools.

■ Rack-type tool magazine

Tools are stored vertically in racks, resulting in a small space requirement for any tool storage capacity rack magazine. High speed and smooth tool loader movement reduces tool waiting time and vibration, preventing any effect on machined surfaces. The 84-tool and 120-tool rack magazines can be expanded after the initial installation.



Standard 42-tool rack magazine

Tool storage	42 tools* (standard)	84 tools (option)	120 tools (option)	162 tools (option)
Tool selection method	Fixed pocket number	Fixed pocket number	Fixed pocket number	Fixed pocket number
Available tool capacity expansion	–	126 tools/168 tools	162 tools	–

* 650 mm long tools can be stored on the bottom rack. The top and middle racks can store tools up to 500 mm long.

■ TOOL HIVE OPTION

The TOOL HIVE can store more than 180 tools in a small space. Operation and tool data editing can be performed on the TOOL HIVE TERMINAL control panel to reduce the time required for tool setup. The TOOL HIVE tool storage capacity can be expanded after the initial installation.

TOOL HIVE TERMINAL



240-tool TOOL HIVE magazine

High Productivity

2-pallet changer for reduced setup time

2-pallet changer

Rotary type 2 pallet changer is standard equipment. Workpiece loading and setup can be performed during machining to increase productivity.

Loading station rotation




Pallet at loading station is turned by motor for ease of setup. Standard equipment for the e-1600V/10 and optionally available for the e-1250V/8.





A variety of pallets/chucks is available to meet any machining requirement

OPTION

Wide variety of chucks, pallets and face plates is optionally available.

Machines							
	Tapped square pallet with location bore		Tapped round pallet with location bore			3 jaw scroll chuck	
	ø800 mm (ø31.50")	ø1000 mm (ø39.37")	ø1000 mm (ø39.37")	ø1250 mm (ø49.21")	ø1400 mm (ø55.12")	ø1000 mm (ø39.37")	ø1400 mm (ø55.12")
e-1250V/8	○	○	○	—	—	○	—
e-1250V/8S	○	○	○	○	—	○	—
e-1600V/10	—	○	—	○	○	—	○
e-1600V/10S	—	○	—	○	○	—	○

Machines						
	Face plate with jaws				4-jaw independent chuck	
	ø800 mm (ø31.50")	ø1000 mm (ø39.37")	ø1250 mm (ø49.21")	ø1400 mm (ø55.12")	ø1000 mm (ø39.37")	ø1400 mm (ø55.12")
e-1250V/8	—	○	—	—	○	—
e-1250V/8S	○	○	○	—	○	—
e-1600V/10	—	—	—	○	—	○
e-1600V/10S	—	—	—	○	—	○

Note: Single table e-1250V/8S and e-1600V/10S: Tables are bolted to machine base.

○: Available —: Not Available

Remote manual pulse generator

The remote manual pulse generator provides convenient operation when the operator is not close to the CNC operation panel. Its display shows the position display and the machine coordinate values. 4 different positions can be registered in memory by the remote manual pulse generator. An optional wireless remote manual pulse generator is available.



Tool magazine operation panel


The tool magazine operation panel is designed for increased ease of operation. Instead of incorporating just a forward/reverse button for indexing the tool magazine and manually positioning the desired tool pocket, the pocket number or tool number can be input into the operation panel numeric keypad and the desired pocket will be brought in position automatically. This is standard equipment for the different capacity tool magazines.



Tool magazine operation panel/Tool ID

OPTION

This panel displays tool data, eliminating trips back to the machine CNC. By touching the tool data, the tool magazine will be indexed to the selected tool. The sort key quickly shows which tool pockets are empty.

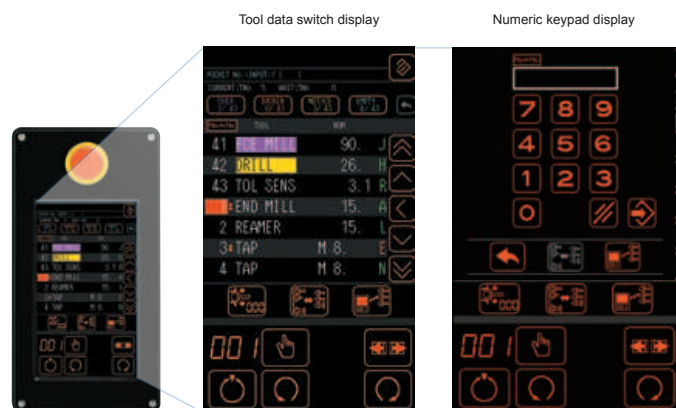

Ergonomics

Design focus on ergonomics provides unsurpassed ease of operation

Large window

Through large windows on the 2 pallet changer cover door, the operator easily sees the status of the workpiece in the setup station.



Convenient workpiece loading/unloading

Easily implement an overhead crane for loading/unloading heavy workpieces and fixtures.



Large window

The large front window allows the operator to monitor workpiece machining easily.



2 pallet changer




Single table

Shown with operator platform, 84-tool magazine and status light (3 colors)


Convenient access to machining area

Steps outside the machine and inside the machine are standard equipment to provide convenient access to the operator.

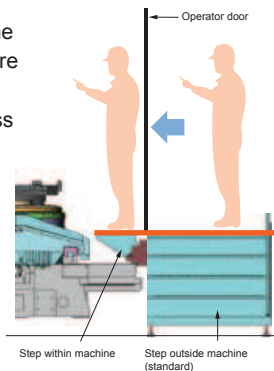

Convenient access

The step inside the machining area is the same height as the external platform, providing excellent accessibility for workpiece or tool inspection.

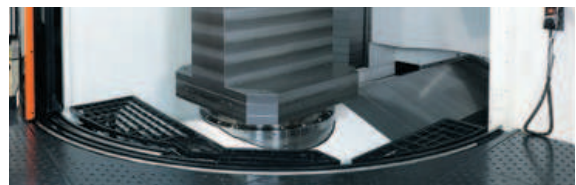


ergonomics

Convenient location of tool magazine

The tool magazine is located next to the CNC operation panel to significantly reduce the distance the operator must cover for machine setup.


2 pallet changer

■ : Operation area

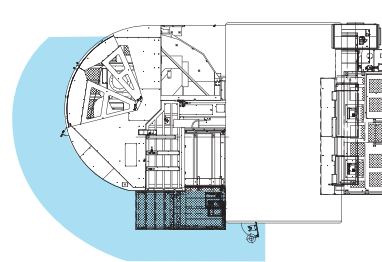

Single table

■ : Operation area

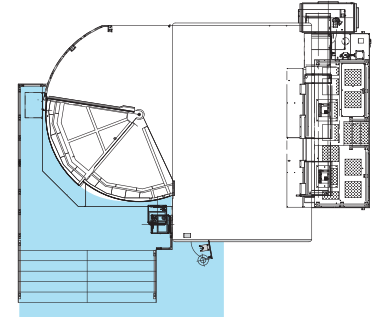

Adjustable CNC touch panel

Operational touch panel can be tilted to the optimum position for any operator's height to ensure ease of operation.




Rotation 90°



Tilt 45°

Centralized location


All items that require frequent access, such as hydraulic and pneumatic valves and lubrication inlets, are at the same location to make daily maintenance easier.

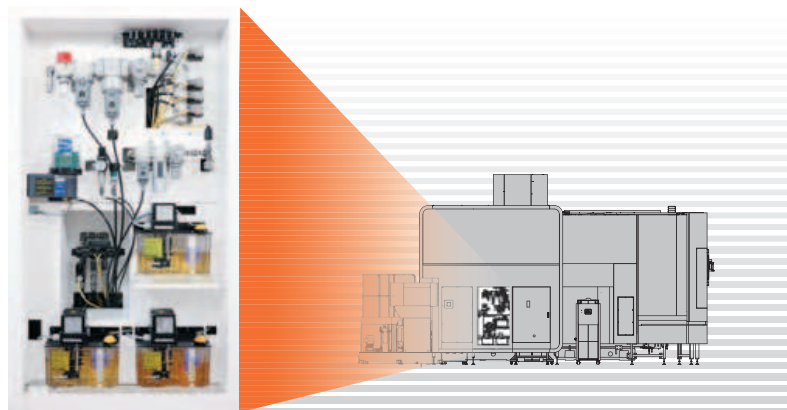

Intelligent Machine



Mazak has developed a variety of functions for the improvement of productivity, high-accuracy machining and operator support. Unique technologies incorporate the expertise of experienced machine operators to realize unsurpassed productivity and higher accuracy machining.

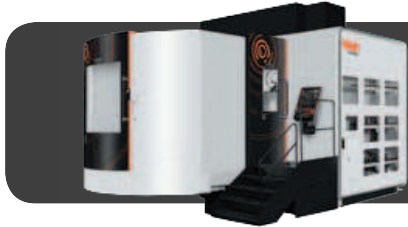

Advanced Intelligent+ Functions

A variety of Intelligent+ Functions provide incomparable operator support for exceptional ease of operation and optimum machine efficiency.

Set up



Machine Interference Prevention
INTELLIGENT SAFETY SHIELD



Verbal Message System
MAZAK VOICE ADVISER

When an operator manually moves the machine axes for setup, tool measurement or changing inserts, the CNC shows a synchronized 3D model on the display for checking machine interference. If any machine interference occurs, the machine motion automatically stops. This function also is active during automatic operation.

Verbal support for machine setup and safe conditions confirmation.

Machining



Convenient Parameter Setting and Fine Tuning Function
SMOOTH MACHINING CONFIGURATION




Variable Acceleration Control Function
VARIABLE ACCELERATION CONTROL

Variable acceleration control is a new function that permits the faster acceleration capability of linear axes to be used whenever possible. The slower acceleration of the rotary axes is not used for all program commands, resulting in faster machining cycle times.

Machining time, finished surface smoothness and machining shape can be adjusted for improved productivity.



Minimized Vibration
ACTIVE VIBRATION CONTROL
Machine vibration can be reduced to perform excellent machining accuracy and high-speed machining.

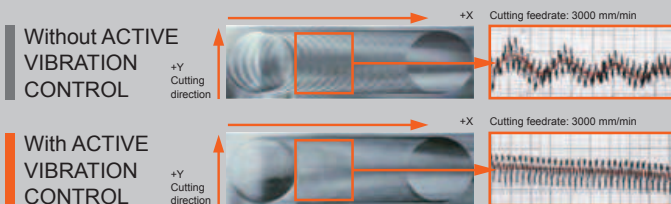

Maintenance



Comprehensive Spindle Monitoring

INTELLIGENT PERFORMANCE SPINDLE

The INTELLIGENT PERFORMANCE SPINDLE uses sensors housed in the spindle to monitor a variety of properties, including temperature, and provide useful information to the operator. This monitoring minimizes production loss caused by machine down time.



▲ Condition Check
Temperature as well as the motor load can be displayed.



▲ Running recorder
Operation status of milling spindle (rpm/motor load) can be recorded for up to one year.



Comprehensive Maintenance Monitoring

INTELLIGENT MAINTENANCE SUPPORT

Useful information for improved preventive maintenance to eliminate unexpected machine downtime.



Seamless Corner Control

SMOOTH CORNER CONTROL



Improved finished surfaces and reduced cycle times by optimized acceleration/deceleration when machining corners

Other systems

Move to next command position after reaching current command position

SMOOTH CORNER CONTROL

Move to next command position within tolerance band



Heat Displacement Control

INTELLIGENT THERMAL SHIELD

The INTELLIGENT THERMAL SHIELD is an automatic compensation system for room temperature changes, which realizes enhanced continuous machining accuracy. MAZAK has performed extensive testing in a variety of temperature-controlled environments and has used the results to develop a control system that compensates automatically for temperature changes in the machining area. Changes in room temperature and compensation data are shown visually.



Temperature and compensation is displayed on screen. The operator can adjust compensation by looking at the data.

MAZATROL CNC System

The seventh generation MAZATROL CNC system
and the core of SMOOTH TECHNOLOGY

MAZATROL *SMOOTHX*

From setup to machining, designed for
unsurpassed ease of operation



Three-color status indicator

Machining status is indicated by three colors:
Green: Automatic operation mode
Yellow: Machining completion
Red: Alarm

19" touch panel

Touch panel operation similar to
your smartphone or tablet

USB port

Interface for peripheral equipment
USB 1.0+2.0 standard

SD card slot

Transfer programs and tool data

Operation switches

Large switches change color from orange to
green when activated

Dials

For selection of frequently used axes
and feedrate changes

New interface with touch operation ensures convenient data processing, programming, confirmation, editing and tool data registration.

Process home screens

Five different home process screens – each home screen displays the appropriate data in an easy-to-understand manner. Touch icons in each process display for additional screen displays.


Programming



Tool data



Setup

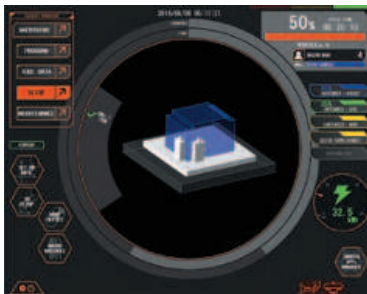

Machining




Maintenance



Pop-up windows

Values and items can be input/selected easily on pop-up windows.

Side menu

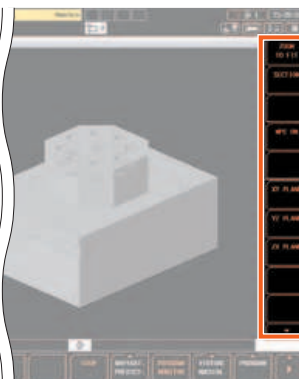

List menu



Screen keyboard




MAZATROL CNC System

Visible programming screen

QUICK EIA

Program, process list and 3D tool path display are linked to each other. Visible search on touch screen can reduce the time for program checking.



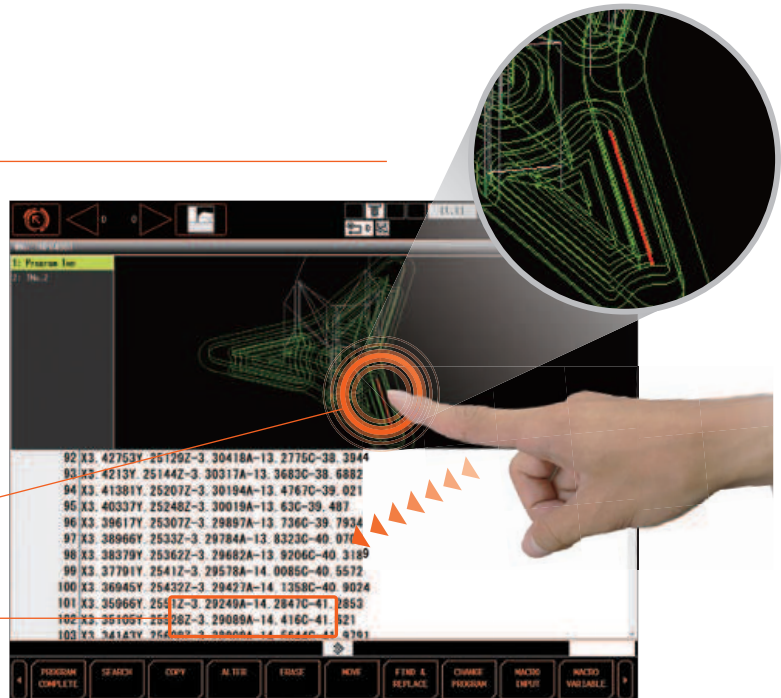


Selecting tool path by touching the screen

Moving to the corresponding EIA program line


VIEW SURF

By analyzing tool path, any predictable failure on the finished surface can be visualized. Program modification can be done before machining to minimize the time for test cutting.

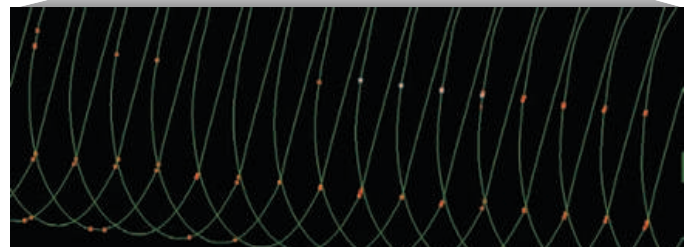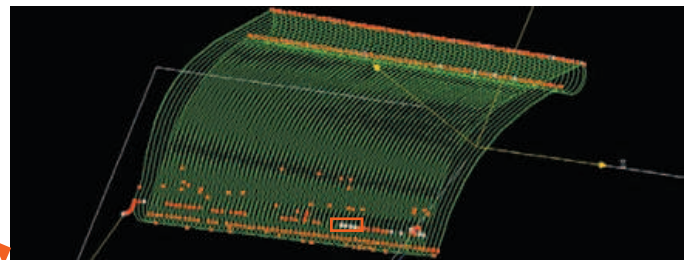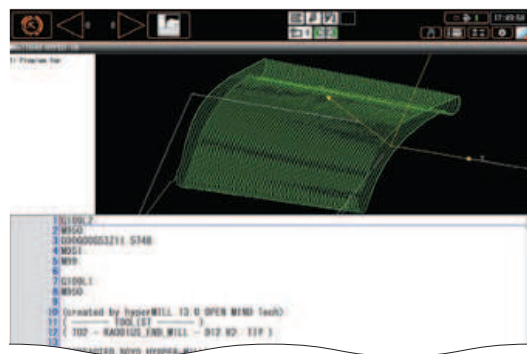


QUICK MAZATROL

MAZATROL program, unit list and 3D workpiece shape are linked to each other. After defining a machining unit in a MAZATROL program, the 3D shape is displayed immediately to check for any programming error quickly and easily.

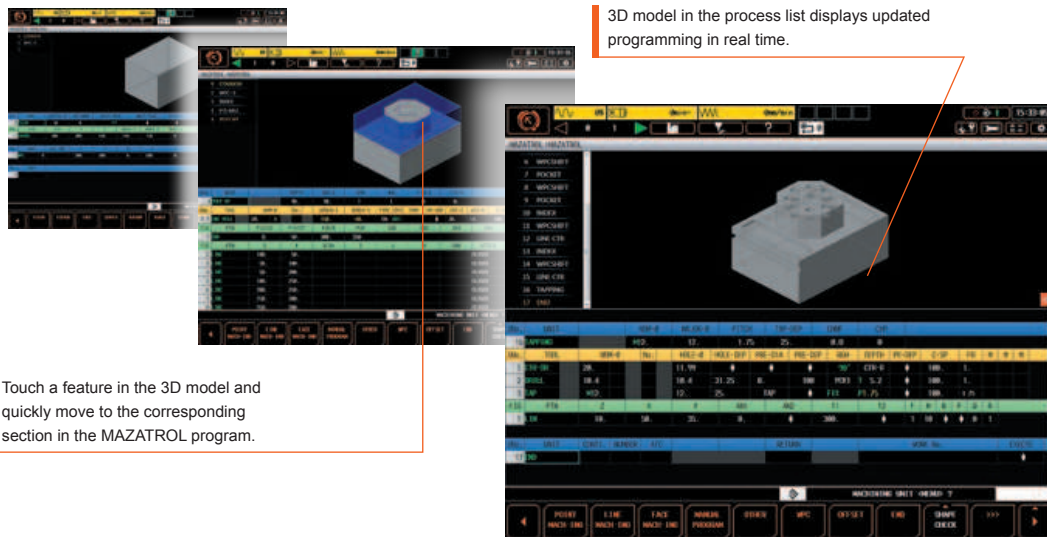

3D ASSIST

Workpieces and coordinate data can be imported from 3D CAD data to a MAZATROL program. No coordinate value inputs are required. This can reduce input errors and time for program checking.

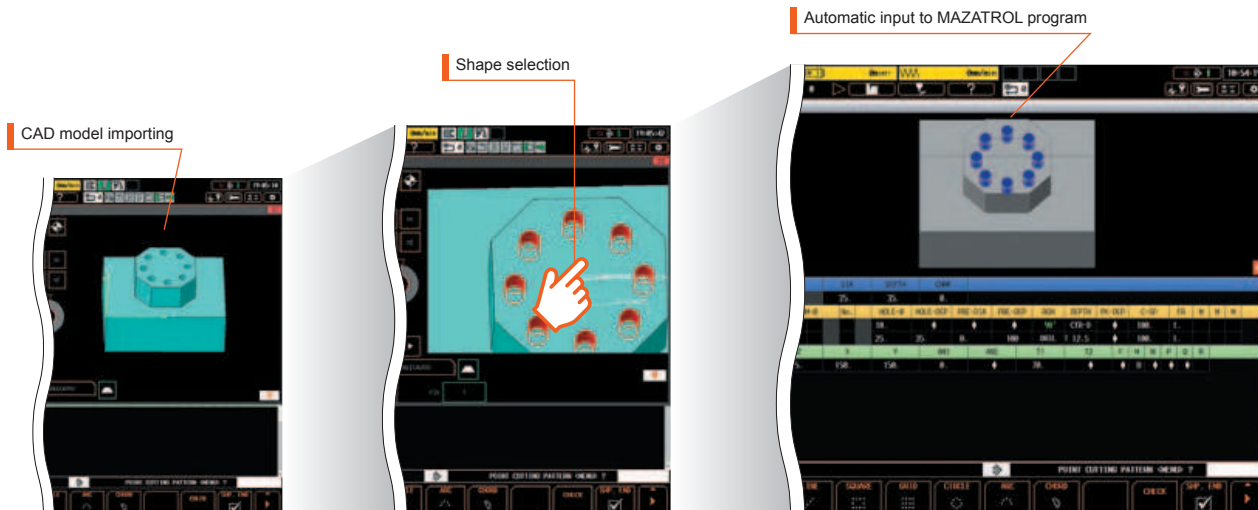

MAZATROL CNC System

Network integration – convenient connection to automation equipment

Smooth Process Support Software for efficient factory management

OPTION




Data sharing between SmoothX CNC and office PCs for improved production efficiency.



Networking to peripheral equipment

OPTION

Convenient network connection to peripheral equipment thanks to industrial network standards

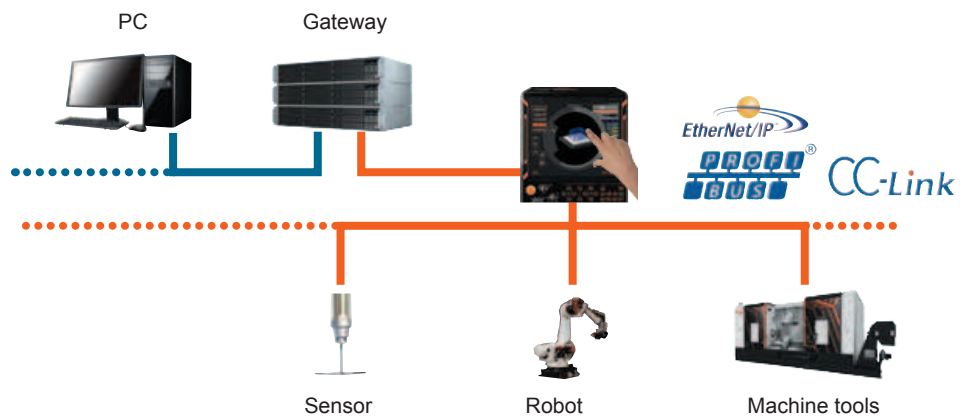

EtherNet/IP is a trademark of ODVA (Open Device Net Vendor Association).
 PROFIBUS is a trademark of PROFIBUS User Organization.
 MTConnect is a registered trademark of AMT (Association of Manufacturing Technology).

Factory Automation

Unmanned operation for enhanced productivity

The modular design of the PALLETECH conveniently allows more machines and increased pallet storage capacity to be added to the system after the initial installation in response to changing production requirements. The pallet stoker is available with one, two and three levels for large pallet storage capacity with small floor space requirements.



PALLETECH SYSTEM

(shown with 1 level stoker with 6 pallets, loading station and one VORTEX)


		Minimum	Maximum
Machines		1	16
Number of pallets	1 level	6	240
	2 levels	12	240
Loading station(s)		1	8
Loading robot		1	1

Machine model	Pallet stoker	
	1 level	2 levels
e-1250V/8	o	o
e-1600V/10	o	—


o: available —: N/A

Machine Dimensions

VORTEX e-1250V/8



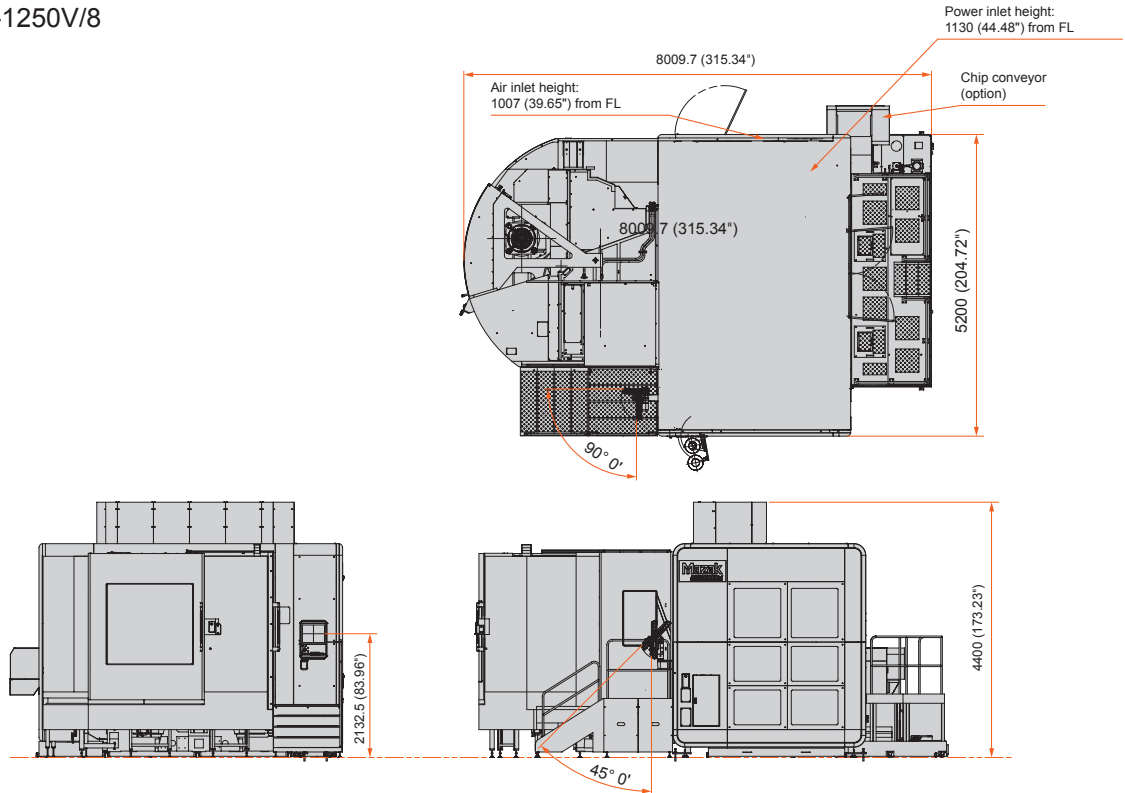


VORTEX e-1250V/8S



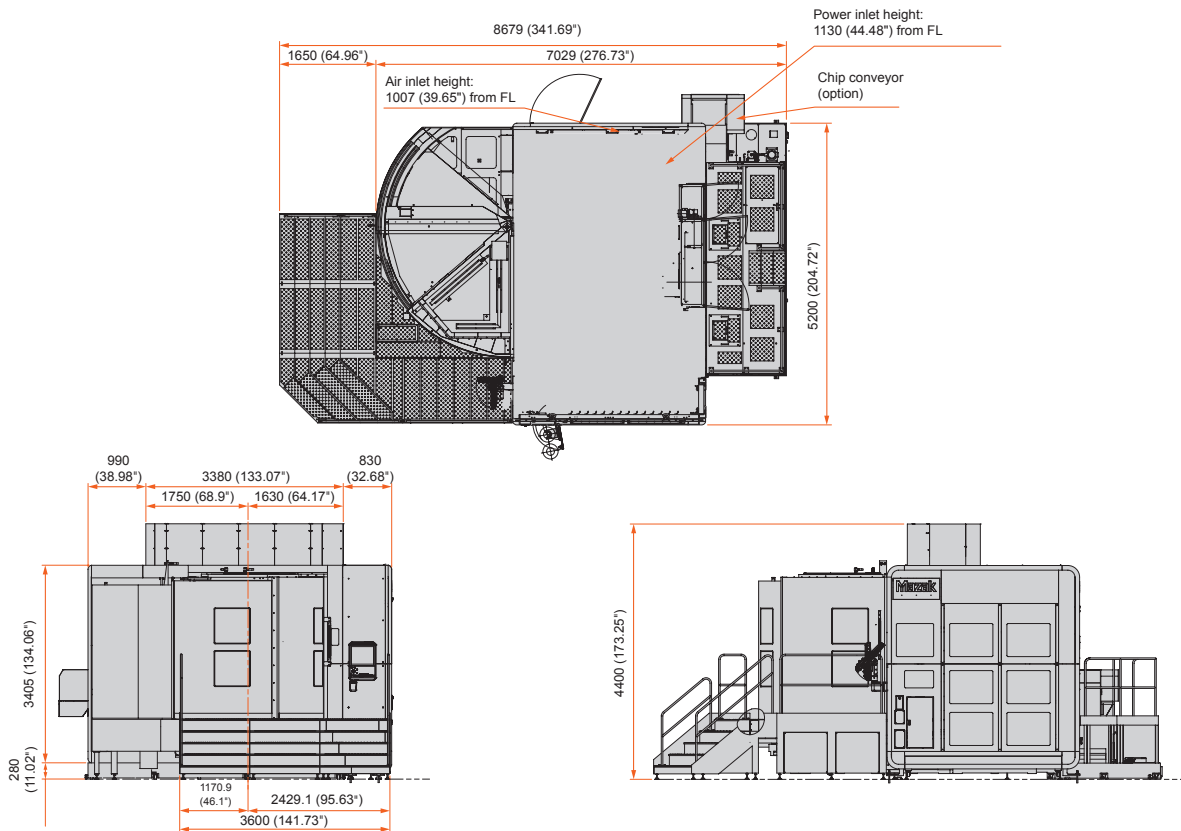


Unit: mm (inch)

VORTEX e-1600V/10

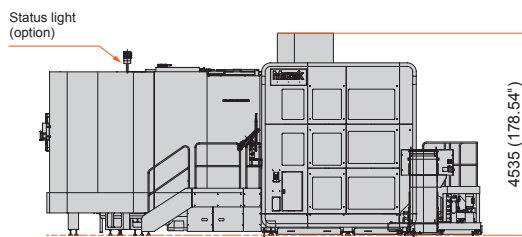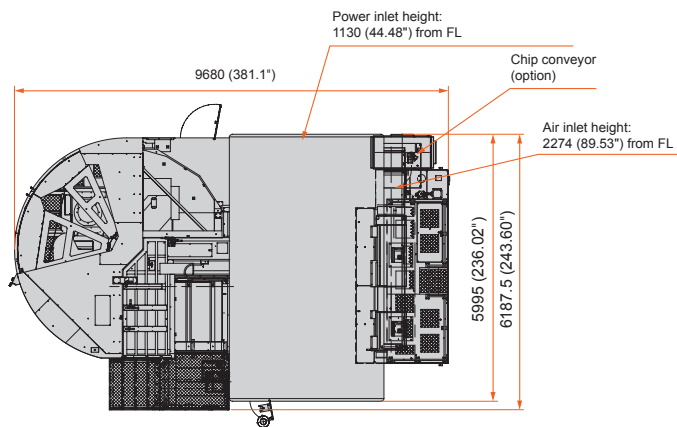

VORTEX e-1600V/10S

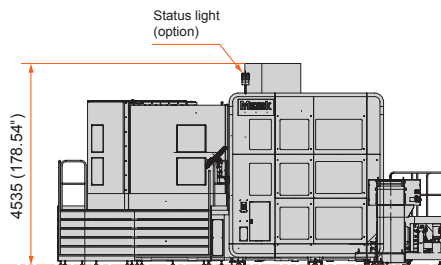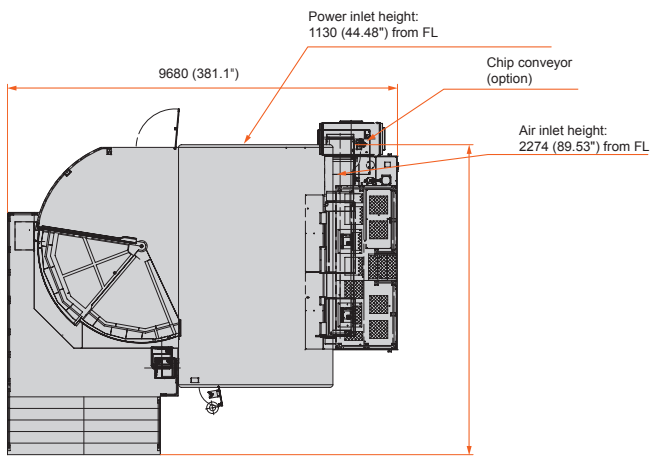

Standard Machine Specifications

		VORTEX e-1250V/8	VORTEX e-1250/8S
Travel	X axis (table forward/backward)	1875 mm (73.82")	
	Y axis (spindle head travel right/left)	1250 mm (49.21")	
	Z axis (spindle head travel up/down)	1345 mm (52.95")	
	B axis (spindle head tilt)	150° (-30° + 120°)	
	C axis (table rotation)	360° (Cont.)	
	Distance between B axis rotation center and pallet center (X axis at home)	1335 mm (52.56")	
	Distance between B axis rotation center and pallet center (X axis at stroke end)	-540 mm (-21.26")	
	Distance between spindle nose and pallet center (B axis = +90°) (X axis at home)	1035 mm (40.75")	
	Distance between B axis rotation center and pallet top face* ¹	50 mm ~ 1395 mm (1.97" ~ 54.92")	105 mm ~ 1450 mm (4.13" ~ 57.09")
	Distance between spindle nose and pallet top face (B axis = 0°)	-250 mm ~ 1095 mm (-9.84" ~ 43.11")	-195 mm ~ 1150 mm (-7.68" ~ 45.28")
Capacity	Max. workpiece size* ¹	ø1450 mm x 1600 mm (ø57.09" x 62.99")	ø1500 mm x 1655 mm (ø59.06" x 65.16")
	Table load capacity (evenly distributed)	2700 kg (5952 lbs) (Including pallet weight)	4000 kg (8818 lbs) (Including pallet weight)
Spindle	Max. speed	10000 rpm	
	Spindle taper	No. 50	
	Spindle bearing ID	ø100 mm (ø3.94")	
	Spindle acceleration	3.1 sec (0 ~ 10000 rpm)	
	Rapid traverse rate (B axis)	30 rpm	
	Min. indexing angle increment (B axis)	0.0001°	
	Indexing time (C axis)	0.7 sec/90°	
Table	Rapid traverse rate (C axis)	25 rpm	
	Min. indexing angle increment (C axis)	0.0001°	
	Indexing time (C axis)	1.1 sec/90°	
Feedrate* ²	Rapid traverse rate (X, Y, Z axes)	42000 mm/min (1654 IPM)	
	Max. cutting feedrate (X, Y, Z axes)	42000 mm/min (1654 IPM)	
Automatic tool changer	Tool shank	CAT-50	
	Pull stud	ANSI	
	Tool magazine capacity	42	
	Max. tool diameter/length (from gauge line)/max. weight/momentum	ø135 mm (ø5.31")/650 mm (25.59")/30 kg (66.14 lbs)/49 N • m (36 ft • lbs)	
	Max. tool diameter with adjacent tool pockets empty	ø260 mm (ø10.24")	
Automatic pallet changer	Number of pallets	2	–
	Pallet change time	15 sec	–
	Pallet changer type	Rotary type	–
Motors	Spindle motor (40% ED/30-min/Cont. rating)	AC 37/30 kW (50/40 HP)	
Power requirement	Electrical power supply (40% ED/Cont. rating)	113.3 kVA/123.3 kVA	
	Air supply	1000 L/min (35.31 ft ³ /min) (ANR)	
Tank capacity	Coolant tank capacity	1100 L (291 gal)	
Machine size	Machine height (from floor)	4400 mm (173.23")	
	Floor space requirement	5200 x 8009.7 mm (204.72" x 341.69")	5200 x 8009.7 (204.72" x 341.69")
	Machine weight	48500 kg (109127 lbs)	45000 kg (99206 lbs)
CNC		MAZATROL SmoothX	

*¹: With e-1250V/8: ø800 mm (ø31.50") tapped pallet, e-1250V/8S: ø1250 mm (ø49.21") faceplate with jaws and ø1000 mm (ø39.37") tapped pallet, e-1250V/8S: ø1000 mm (ø39.37") faceplate with jaws

*²: Limited feedrate with continuous movement

		VORTEX e-1600V/10	VORTEX e-1600/10S
Travel	X axis (table forward/backward)	2315 mm (94.14")	2165 mm (85.24")
	Y axis (spindle head travel right/left)	1600 mm (62.99")	
	Z axis (spindle head travel up/down)	1345 mm (52.95")	
	B axis (spindle head tilt)	150° (-30° + 120°)	
	C axis (table rotation)	360° (Cont.)	
	Distance between B axis rotation center and pallet center (X axis at home)	1775 mm (69.88")	
	Distance between B axis rotation center and pallet center (X axis at stroke end)	-540 mm (-21.26")	-390 mm (-15.35")
	Distance between spindle nose and pallet center (B axis = +90°) (X axis at home)	1475 mm (58.07")	
	Distance between B axis rotation center and pallet top face* ¹	100 mm ~ 1445 mm (3.94" ~ 56.89")	169 mm ~ 1514 mm (6.69" ~ 59.61")
	Distance between spindle nose and pallet top face (B axis = 0°)	-200 mm ~ 1145 mm (-7.87" ~ 45.08")	-131 mm ~ 1214 mm (-5.16" ~ 47.80")
Capacity	Max. workpiece size* ¹	ø2050 mm x 1600 mm (ø80.71" x 62.99")	ø2300 mm x 1669 mm (ø90.55" x 65.71")
	Table load capacity (evenly distributed)	5000 kg (11023 lbs) (Including pallet weight)	7000 kg (15432 lbs) (Including pallet weight)
Spindle	Max. speed	10000 rpm	
	Spindle taper	No. 50	
	Spindle bearing ID	ø100 mm (ø3.94")	
	Spindle acceleration	3.1 sec (0 ~ 10000 rpm)	
	Rapid traverse rate (B axis)	30 rpm	
	Min. indexing angle increment (B axis)	0.0001°	
	Indexing time (C axis)	0.7 sec/90°	
Table	Rapid traverse rate (C axis)	20 rpm	
	Min. indexing angle increment (C axis)	0.0001°	
	Indexing time (C axis)	1.4 sec/90°	
Feedrate* ²	Rapid traverse rate (X, Y, Z axes)	42000 mm/min (1654 IPM)	
	Max. cutting feedrate (X, Y, Z axes)	42000 mm/min (1654 IPM)	
Automatic tool changer	Tool shank	CAT-50	
	Pull stud	ANSI	
	Tool magazine capacity	42	
	Max. tool diameter/length (from gauge line)/max. weight/momentum	ø135 mm (ø5.31")/650 mm (25.59")/30 kg (66.14 lbs)/49 N • m (36 ft • lbs)	
	Max. tool diameter with adjacent tool pockets empty	ø260 mm (ø10.24")	
Automatic pallet changer	Number of pallets	2	–
	Pallet change time	25 sec	–
	Pallet changer type	Rotary type	–
Motors	Spindle motor (40% ED/30-min/Cont. rating)	AC 37/30 kW (50/40 HP)	
Power requirement	Electrical power supply (40% ED/Cont. rating)	110.7 kVA/120.6 kVA	
	Air supply	1100 L/min (38.85 ft ³ /min) (ANR)	
Tank capacity	Coolant tank capacity	1100 L (291 gal)	
Machine size	Machine height (from floor)	4535 mm (178.54")	
	Floor space requirement	6187.5 x 9680 mm (243.60" x 381.10")	6969.5 x 8711.8 (274.39" x 342.98")
	Machine weight	58000 kg (127866 lbs)	46700 kg (102954 lbs)
CNC		MAZATROL SmoothX	

*¹: With e-1600V/10: ø1000 mm (ø39.37") tapped pallet (option), e-1600V/10S: ø1400 mm (ø55.12") faceplate with jaws (option)

*²: Limited feedrate with continuous movement

Standard and Optional Equipment

		● : Standard ○ : Optional – : N/A			
		e-1250V/8	e-1250V/8S	e-1600V/10	e-1600V/10S
Spindle	CAT #50 spindle	●	●	●	●
	HSK	○	○	○	○
	CAPTO	○	○	○	○
	Standard specification 10000 rpm	●	●	●	●
	High-torque specification 5000 rpm 500 N • m (cont. rating)	○	○	○	○
	High-speed specification 15000 rpm 45 kW (cont. rating)*	○	○	○	○
Table	Standard specification NC rotary table contouring torque 3180 N • m	●	●	●	●
	High-torque specification NC rotary table contouring torque 5180 N • m	○	○	○	○
Column	Z axis high column (250 mm) (9.84")	○	○	–	–
	Z axis high column (300 mm) (11.81")	–	–	–	–
Tool magazine	42 tools-rack type tool magazine	●	●	●	●
	84 tools-rack type tool magazine	○	○	○	○
	120 tools-rack type tool magazine	○	○	○	○
	162 tools-rack type tool magazine	○	○	○	○
	180 tools-TOOL HIVE	○	○	○	○
	216 tools-TOOL HIVE	○	○	○	○
	252 tools-TOOL HIVE	○	○	○	○
	288 tools-TOOL HIVE	○	○	○	○
	324 tools-TOOL HIVE	○	○	○	○
360 tools-TOOL HIVE	○	○	○	○	
Pallet changer	Manual pallet rotation at 2PC loading station	●	–	–	–
	Power pallet rotation at 2PC loading station	○	–	●	–
	FMS preparation for 2PC (Pallet can rotate at loading station)	○	–	○	–
	2PC for FMS (Pallet cannot rotate at loading station)	○	–	○	–
Setup	Absolute position detection (Linear axes)	●	●	●	●
	Manual pulse generator (cable)	●	●	●	●
	Manual pulse generator (wireless)	○	○	○	○
	Automatic tool length measurement & tool breakage detection	○	○	○	○
	Laser milling tool measurement system (NC4/air blast)	○	○	○	○
	Tool breakage detection	○	○	○	○

* HSK tool shank
 Above specifications are for North American market.
 Standard and optional equipment vary by market.

● : Standard ○ : Optional – : N/A

		MEGA TURN 900	MEGA TURN 900S	MEGA TURN 900M	MEGA TURN 900MS
Setup	Preparation for Mazak monitoring system B (RMP-600)	●	●	●	●
	Wireless touch probe (RMP-400)	○	○	○	○
	Tool magazine operation panel	○	○	○	○
	Pull stud with tool ID (#50 Euchner)	○	○	○	○
Automation	Auto power off	●	●	●	●
	Calendar type automatic power on/off and warm-up operation	●	●	●	●
High accuracy	Chiller unit (milling spindle, turning spindle [table], ball screw core cooling)	●	●	●	●
	Ball screw core cooling (X, Y and Z axes)	●	●	●	●
	Scale feedback (Z axis)	●	●	●	●
	Scale feedback (X, Y axes)	○	○	○	○
	Scale feedback (C axis)	●	●	●	●
	Scale feedback (B axis)	○	○	○	○
	Hydraulic unit temperature control	○	○	○	○
	Coolant temperature control	○	○	○	○
Coolant/ chip disposal	Air through spindle (not available during spindle rotation)	●	●	●	●
	Flood coolant and coolant through spindle 1.5 MPa	●	●	●	●
	Super flow coolant system	○	○	○	○
	Niagara coolant	●	●	●	●
	Oil skimmer (RB-200)	○	○	○	○
	Magnetic plate	●	●	●	●
	Mist collector	○	○	○	○
	Hand held coolant nozzle	○	○	○	○
	Hand held coolant nozzle for pallet changer	○	–	○	–
	Pressure switch for coolant through spindle	○	○	○	○
	Secondary filter for coolant (for aluminum)	○	○	○	○
Chip conveyor (side discharge, CONSEP)	○	○	○	○	
Safety equipment	Operator's door interlock	●	●	●	●
	Overload detection	○	○	○	○
	Hydraulic pressure interlock	○	○	○	○

MAZATROL SmoothX Specifications

	MAZATROL	EIA
Number of controlled axes	Simultaneous 2 ~ 4 axes	Simultaneous 2 ~ 4 axes, Simultaneous 5 axes*
Minimum input increment	0.0001 mm, 0.00001°, 0.0001 deg	
High-speed, high-precision control	Shape error designation, Smooth corner control, Rapid traverse overlap, Rotational-shape correction	Shape error designation, Smooth corner control, Rapid traverse overlap, Rotational-shape correction, High-speed machining mode, High-speed smoothing control function, 5-axis spline*
Interpolation	Positioning (Linear interpolation), Positioning (Independent interpolation), Linear interpolation, Circular interpolation, Cylindrical coordination interpolation, Polar coordinate interpolation, Synchronized milling spindle tapping*	Positioning (Linear interpolation), Positioning (Independent interpolation), Linear interpolation, Circular interpolation, Spiral interpolation, Helical interpolation, Cylindrical coordination interpolation, Fine spine interpolation*, NURBS interpolation*, Polar coordinate interpolation*, Synchronized milling spindle tapping*
Feedrate	Rapid traverse, Cutting feed, Cutting feed (per minute), Cutting feed (per revolution), Dwell (specified time, specified number of rotation), Rapid traverse override, Cutting feed override, GO speed variable control, Feedrate clamp, Variable acceleration/deceleration control, Constant control for GO tilting*	Rapid traverse, Cutting feed, Cutting feed (per minute), Cutting feed (per revolution), Inverse time feed, Dwell (specified time, specified number of rotation), Rapid traverse override, Cutting feed override, GO speed variable control, Feedrate clamp, Time constant changing for G1, Variable acceleration/deceleration control, Constant control for GO tilting*
Program registration	Max. number of program: 960, Program storage: 2MB, Program storage expansion: 8MB*, Program storage expansion: 32MB*	
Control display	Display: 19" touch panel, Resolution: SXGA	
Spindle functions	S code output, Spindle speed clamp, Spindle speed override, Spindle speed reaching detection, Multiple position orient, Constant surface speed, Spindle speed command with decimal digits, Synchronized spindle control, Max. speed control for spindle	
Tool functions	Tool offset pairs: 4000, T code output for tool number, Tool life monitoring (time), Tool life monitoring (number of machined workpieces)	Tool offset pairs: 4000, T code output for tool number, Tool offset for group number, Tool life monitoring (time), Tool life monitoring (number of machined workpieces)
Miscellaneous functions	M code output, Simultaneous output of multiple M codes	
Tool offset functions	Tool position offset, Tool length offset, Tool diameter/tool nose R offset, Tool wear offset	
Coordinate system	Machine coordinate system, Work coordinate system, Local coordinate system, Additional work coordinates (300 set)	
Machine functions	-	Rotary axis pre-filter, Angled surface cutting, Hobbing*, Hobbing II*, Shaping function*, Dynamic compensation II*, Tool nose point control*, Tool diameter compensation for 5-axis machining*, Workpiece positioning error compensation*
Machine compensation	G0/G1 independent backlash compensation, Pitch error compensation, Geometric deviation compensation, Volumetric compensation*	
Protection functions	Emergency stop, Interlock, Stroke check before traveling, Retraction function for the vertical axes, INTELLIGENT SAFETY SHIELD (manual mode), INTELLIGENT SAFETY SHIELD (automatic mode), MAZAK VOICE ADVISER	
Automatic operation mode	Memory operation	Memory operation, Tape operation, MDI operation, Ethernet operation*
Automatic operation mode	Optional stop, Dry run, Automatic handle control, TPS, Restart, Machine Lock	Optional block skip, Optional stop, Dry run, Automatic handle control, MDI control, TPS, Restart, Restart 2, Collation stop, Machine lock
Manual measuring functions	Tool length and tip teach, Touch sensor coordinates measurement, Workpiece offset measurement, WPC coordinate measurement, Measurement on machine	Tool length and tip teach, Tool offset teach, Touch sensor coordinates measurement, Workpiece offset measurement, WPC coordinate measurement, Measurement on machine
Automatic measuring functions	WPC coordinate measurement, Automatic tool length measurement, Touch sensor orientation confirmation, Tool breakage detection, External tool breakage detection*	Automatic tool length measurement, Touch sensor orientation confirmation, Tool breakage detection, External tool breakage detection*
MDI measurement	Partial auto tool length measurement, Auto tool length measurement, Coordinate measurement	
Interface	PROFIBUS-DP*, EtherNET I/P*, CC-Link*, USB	
Card interface	SD card interface	
EtherNet	10M/100M/1Gbps	

Environmentally friendly

Designed with environmental considerations



The environment and our impact on natural surroundings have always been important concerns for Mazak. All factories in Japan that produce Mazak machine tools are ISO 14001 certified, an international standard confirming that the operation of our production facilities does not adversely affect air, water or land.

Environmental considerations

Reduction of energy consumption

Worklights in machine and CNC screen backlight turn off automatically after a preregistered period of inactivity. The optional chip conveyor automatically stops operation at the end of workpiece machining.

Reduction of lubrication consumption


Compared to a conventional oil system, the grease lubrication system has significantly lower lubricant consumption.

Extended service life of coolant

Grease lubrication eliminates tramp oil in the coolant, which prevents coolant deterioration and reduces coolant disposal frequency.

Energy Dashboard OPTION

⚡ Energy consumption displayed on graph

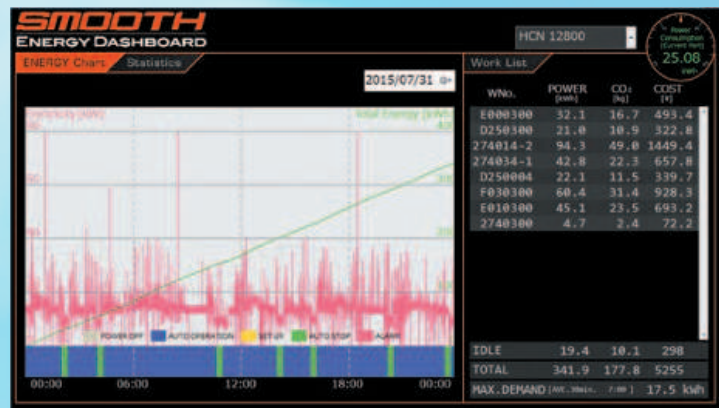

Current energy consumption on process screen



⚡ Analysis of energy consumption



* Requires optional power meter

Mazak

VORTEX e-V SERIES

YAMAZAKI MAZAK CORPORATION

1-131 Takeda, Oguchi-cho, Niwa-gun, Aichi-Pref., Japan
TEL: +(81) 587-95-1131 FAX: +(81) 587-95-2717

www.mazak.com

- Specifications are subject to change without notice.
- This product is subject to all applicable export control laws and regulations.
- The accuracy data and other data presented in this catalogue were obtained under specific conditions. They may not be duplicated under different conditions (room temperature, workpiece materials, tool material, cutting conditions, etc.).

VORTEX e-V SERIES 16.08.2000 T 99J280516E0

